


11	CLIP	POLYPROPYLENE
10	ACTUATOR	POLYPROPYLENE
9	OUTER GASKET	BUNA
		POLYETHYLENE-TRISEAL
		BUTYL
8	RETAINER	POLYPROPYLENE
7	CLOSURE	POLYPROPYLENE
6	PISTON	POLYETHYLENE
5	STEM	ACETALIC RESIN
4	LONG SPRING	STAINLESS STEEL
3	HOUSING	POLYPROPYLENE
2	BALL	ACETALIC RESIN
1	DIP TUBE	POLYETHYLENE
N	COMPONENTS	MATERIALS

Tolerances		
	mm	inches
a	0,40	0,016
	-0,40	-0,016
b	0,72	0,028
	-0,72	-0,028
c	0,27	0,011
	-0,37	-0,015
d	0,20	0,008
	-0,10	-0,004
e	0,20	0,008
	-0,20	-0,008
f	0,05	0,002
	-0,15	-0,006
g	0,57	0,022
	-0,17	-0,007

Dosages (µl)	Stroke	
	mm	inches
1200	12,1	0,476

CLOCKWISE OPENING

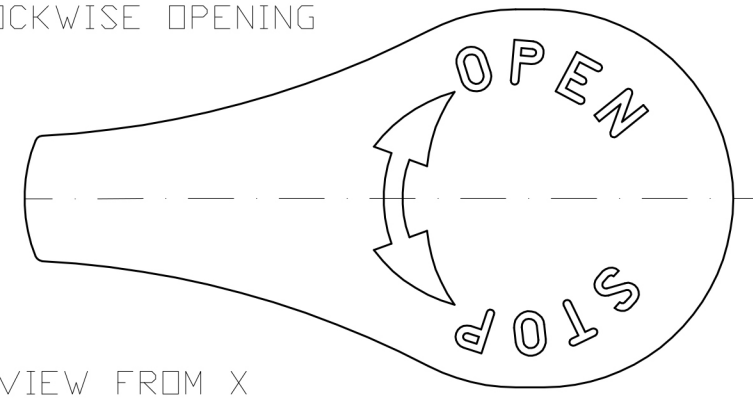

VIEW FROM X

DIMENSIONS SHOWN DO NOT ALLOW FOR MATERIAL COMPRESSION
 The exact materials used in the ordered execution are specified and univocally defined by the commercial description/production codes.
 Aptar reserves the right to modify/amend this specification without prior notice or approval

Dimensions in mm	Description			
	GS-24/410-2N B2 CLIP GE15			
Use	Scale			
	Chkd.			
	Drawn	Bascelli		
		Name		Signature

Mod. ENG/UTP_018_Rev.1A