

1


2

3

4

MARK	REVISER	DESCRIRTN	DATE

K

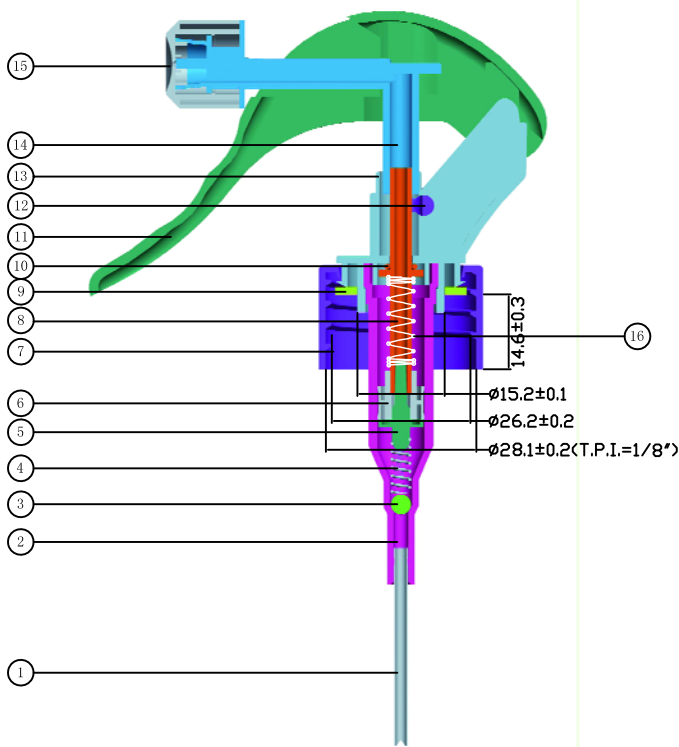

16	Short Spring	SUS304H		1	
15	Nozzle	PP-M800E	上海石化	1	
14	Pitman Shaft	PP-M800E	上海石化	1	
13	Connection	PP-M800E	上海石化	1	
12	Lock	PDM-F20-02	韩国工程塑料	1	
11	Trigger	PP-M800E	上海石化	1	
10	Rubber □ Ring	NBR		1	
9	Gasket	LDPE-2012TN26	齐鲁石化	1	
8	Stem	PDM-F20-02	韩国工程塑料	1	
7	Closure	PP-M800E	上海石化	1	
6	Piston	LDPE-2012TN26	齐鲁石化	1	
5	Needle	PDM-F20-02	韩国工程塑料	1	
4	Long Spring	SUS304H		1	
3	Ball	Glass		1	
2	Housing	PP-M800E	上海石化	1	
1	Dip Tube	LDPE-2012TN26	齐鲁石化	1	
NO.	Component	Material	供应商	QTY	Remark

TOLERANCE			○
0mm-15mm	±0.05	±0.10	±0.50
15mm-30mm	±0.05	±0.15	±1.00
30mm-50mm	±0.10	±0.20	±1.50
50mm-99mm	±0.15	±0.30	±2.00
ABOVE 99mm	±0.20	±0.40	±2.50
CENTER	±0.10	±0.50	±1.00
ANGLER	±0.25°	±0.50°	±2.00°

DRAFTER:

UNIT: mm

CHECKED:

MODEL NAME:  
GT-JF28TITLE:  
GT-JF28 28-410 Smooth Assemble

SENSOR:

SCALE:  
2:3VISUAL ANGLE  
Q'TY:  
1/1REV:  
A0

APPROVED:

PART NO:

FILE NO:

D-

1

2

3

4