


SPECIFICATION 105492

PARAMETER	METHOD / DEVICE
WEIGHT	Digital scale Axis (precision 0,01g)
HEIGHT	GAWIS 4D, Gawis-OD Agr / Electronic altimeter (precision 0,01mm)
TOP LOAD	Top Load Agr / Digital Newton meter BFG N (0,1-500N)
DIAMETER	Gawis 4D, Gawis-OD Agr / Micrometer of 0,001mm precision, according to DIN863
COMPONENTS	Gawis 4D, Gawis-OD Agr / Digital caliper of 0,01mm precision, according to DIN 862
MATERIAL DISTRIBUTION & WALL THICKNESS	Gawis 4D, Gawis-OD Agr / PTG5004 AGR, AMTG-2 Accurate Magnetic Thickness Gauge
TOTAL CAPACITY AND FILLING HEIGHT	Combi Agr
HORIZONTAL AND VERTICAL ALIGNMENT	Gawis 4D, Gawis-OD Agr / Angle gauge, according to DIN 875/0 + Gap gauge (0.05-1,0mm) (max. 1.0mm/100mm)
STABILITY ON THE SURFACE	Flat marble slab + Gap gauge (0,05-1,0mm)
COLOUR	Spectrophotometer Ci5 (laser measurement) according to standard
TIGHTNESS	Vacuum chamber (underpressure of 600mbar during 180s.)
DROP TEST	Trap on 1,5m height
PRODUCT IMPLEMENTATIONS AND QUALITY ANALYSIS ARE PERFORMED WITH THE USE OF THE FOLLOWING DEVICES: Gawis 4D, Agr Gawis-OD, Top Load/Combi, PTG5004, PG9800T, AMTG-2 Accurate Magnetic Thickness Gauge	



TECHNICAL DRAWING

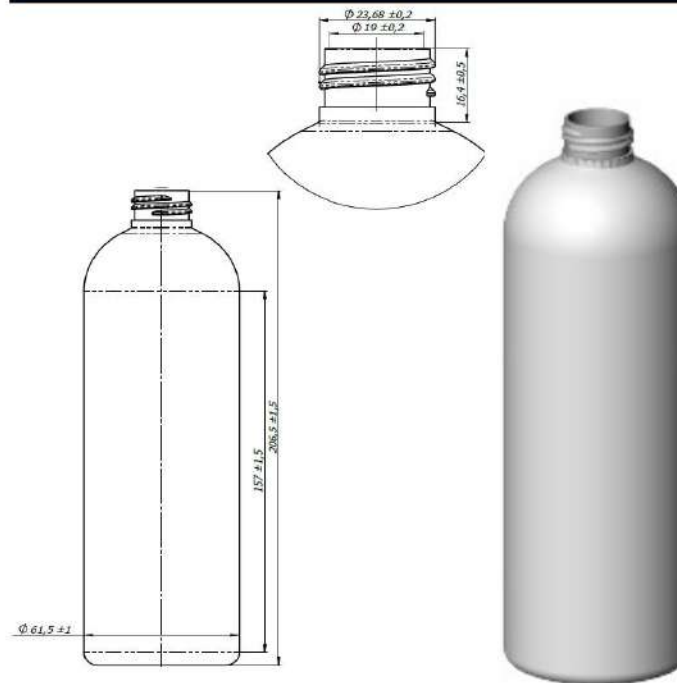

VISUAL PACKAGING

PALLET APPEARANCE

ARRANGEMENT ON LAYER



ON PALLET	1320 pcs.
LAYERS	5
ON LAYER	264 pcs.
PALLET HEIGHT	1200,00 mm

Capacity:	500 ml
Thread:	24-410
Material:	polyethylene terephthalate

Parameters	Given dimensions	Tolerance
Height (mm)	206,50	+/- 1,5
Diameter of base (mm)	61,50	+/- 1,0
Weight (g)	26,00	+/- 1,0
Total capacity (ml)	522,00	+/- 10,0
Distance to the cap (mm)	16,40	+/- 0,5
Outer diameter thread with a roll (mm)	23,68	+/- 0,2
Inner diameter of the hole (mm)	19,00	+/- 0,2
VERTICAL (max 1/100mm)	V	V
IT SHRINKS ON SURFACE SECONDARY	X	-
SHAPE CONFORMITY	V	-
STABILITY BASE BOTTLE	V	-

STORAGE CONDITIONS AND EXPIRY DATE

Storage rooms should be dry, airy, with no access to sunlight, with a temperature of -10°C to 40°C and air humidity of 0-90%.

In the case of storage at a temperature lower than room temperature, it is recommended to condition it for at least 24 hours at room temperature before packaging and labelling. Expiry date of the packaging: up to 12 months from the date of purchase.

We have implemented and certified Management System PN EN ISO 9001:2015, ISO 15378:2017, ISO 15593:2010, ISO 14001:2015

Legal disclaimer: This declaration of conformity is valid at the time of issue until the company publishes a new version of the declaration.