


CAP SPECIFICATION

TECHNICAL DRAWING

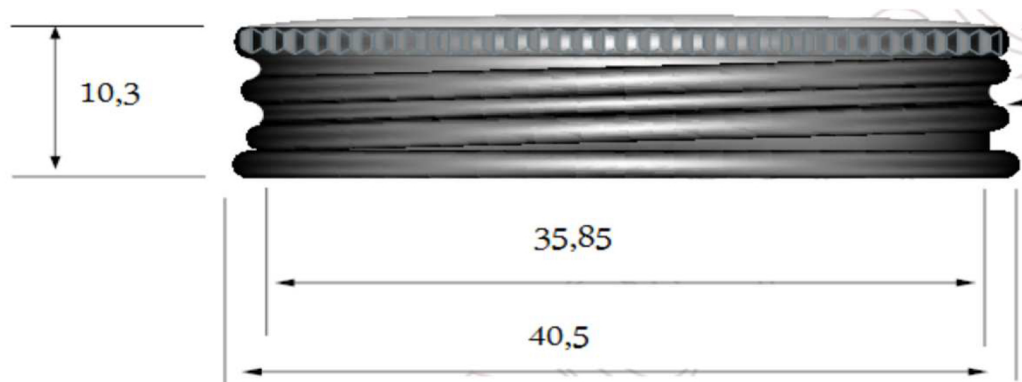

Recommended screwing force

2,5 - 3,5 Nm

Declaration of conformity with the essential requirements of the following regulations:

Commission Regulation (EC) No 1895/2005 - BADGE, NOGE and BFDGE are not used for the production of this species

Regulation of the European Parliament and Council Regulation (EC) No 1935/2004 of 27 October 2004 on materials and articles intended to come into contact with food and repealing Directives 80/590/EEC and 89/109/EEC

Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals - ANEX XIV, XV

Commission Regulation (EC) No 10/2011 of 14 January 2011 the materials and articles intended to come into contact with food - packaging may be used for contact with all types of food

Commission Regulation (EC) No 2023/2006 of 22 December 2006 on good manufacturing practice for materials and articles intended to come into contact with food

European Parliament and Council Directive 94/62/EC December 1994 on packaging and packaging waste

Thread: 38-400

Material: aluminium, polyethylene seal

DIMENSIONS

Outer diameter [mm]	40,50 +/- 0,30
Inner diameter [mm]	35,85 +/- 0,20
Height [mm]	10,30 +/- 0,20
Weight [g]	2,20 +/- 0,15

Destiny

PET jars closure

Requirements for storage and transportation

Storage areas should be dry, airy, with eliminated sunlight, at the temperature of 10°C to 30°C and humidity of 30-80%

It is forbidden to store bottles in the open air or expose them to direct sunlight

Packaging is stable in the temperature range from 0°C to 30°C

PARAMETER	METHOD / DEVICE
WEIGHT	Digital scale Axis (d=0.01)
HEIGHT	Digital altimeter Mitutoyo (0.01mm/0,0005)
DIAMETER	Micrometer of 0.01mm precision, according to DIN 863
COMPONENTS	Digital caliper of 0.001mm precision, according to DIN 862

23.05.2021

date, authorised person signature

All products are subjected to inspection and released into the main warehouse after verification of the Quality Control Department, according to the Product Specification, which is drawn up on the basis of technical drawing, with the use of the above methods and written down in the Measurement Card