

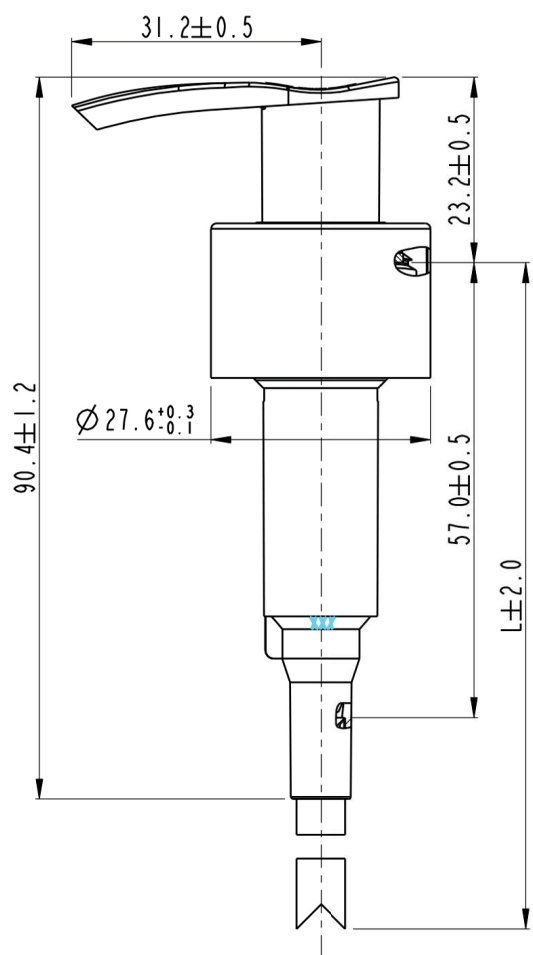


K

MARK	REVISER	DESCRITRN	DATE

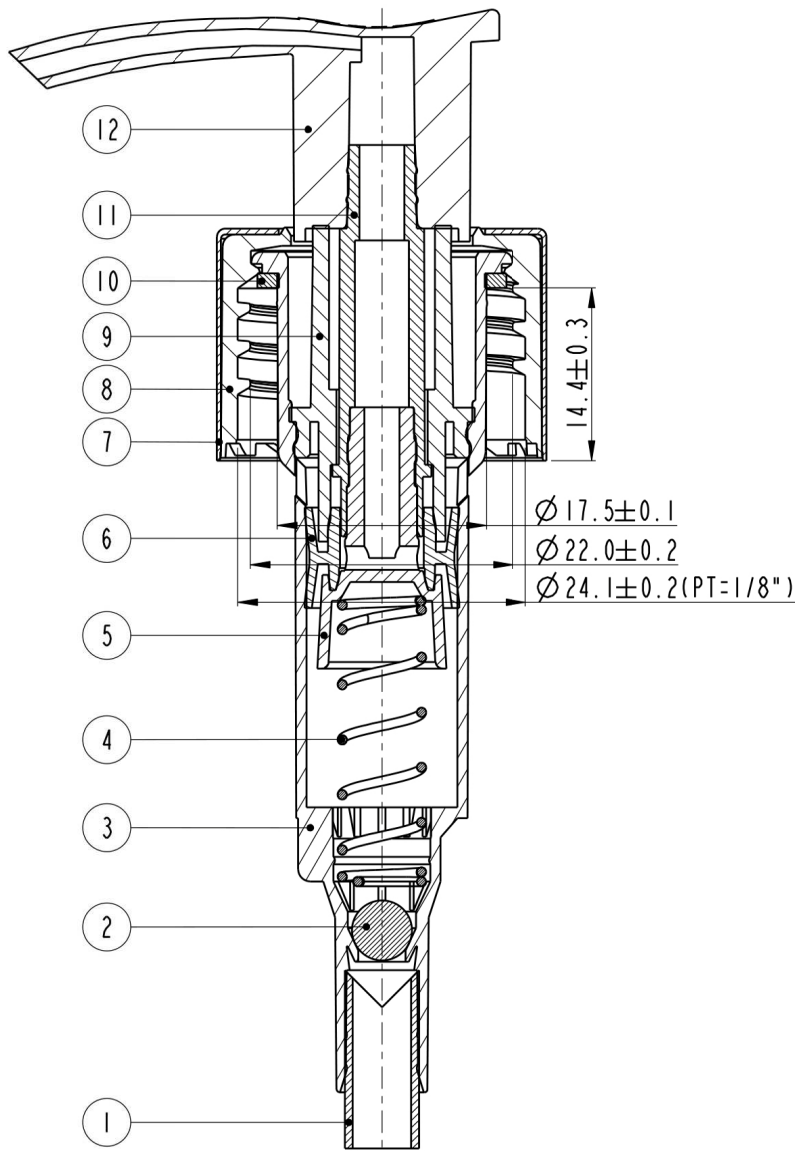

Section A-A
Scale 1.000

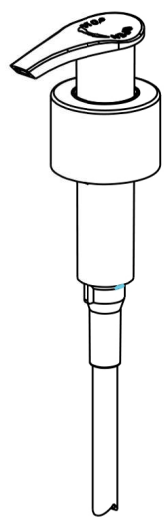

Scale 0.500

Section A-A

Discharge Rate:1.20-1.50ml/T

12	Actuator	PP	Color for order form		I
11	Stem	PP	Natural		I
10	Gasket	PE	Ø20.8*1.2 thickness		I
9	Switch	PP	Natural		I
8	Closure	PP	Color for order form		I
7	ALU.Closure	AL	Color for order form		I
6	Piston	LDPE	Natural		I
5	Needle	HDPE	Natural		I
4	Spring	SUS304	ø0.78*ø7.4*31.5L*10.5 circle		I
3	Housing	PP	Color for order form		I
2	Ball	Glass	Ø5.0		I
1	Dip Tube	LDPE	Ø6.20*0.65 thickness		I
NO.	Component	Material	Specification	Part No.	QTY Remark

TOLERANCE			○	DRAFTER:	UNIT: mm			
0mm-15mm	±0.05	±0.10	±0.50		MODEL NAME:	TITLE:		
15mm-30mm	±0.05	±0.15	±1.00	CHECKED:		24-410(AL) Assemble		
30mm-50mm	±0.10	±0.20	±1.50		SCALE:	VISUAL ANGLE	Q'TY:	REV:
50mm-99mm	±0.15	±0.30	±2.00	CENSOR:	1.5:1		1/1	A0
ABOVE 99mm	±0.20	±0.40	±2.50		PART NO:	FILE NO:		
CENTER	±0.10	±0.50	±1.00	APPROVED:	107521	D-		
ANGLER	±0.25°	±0.50°	±2.00°					